

# Pushbutton Units and Indicator Lights

## SIRIUS 3SB3, ○□ Round and Square Design

### Contact block position for selector switches & 3-position push-pull

#### Selection and ordering data

Switch Position (front of switch)	Circuit	Contact Block	Block Position <sup>1)2)</sup>
--------------------------------------	---------	---------------	--------------------------------

#### Two-Position Selector Contact Block Selection

Switch Position (front of switch)	Circuit	Contact Block	Block Position <sup>1)2)</sup>
	1 NO	<b>3SB34 00-0B</b>	Any Position
	1 NC	<b>3SB34 00-0C</b>	Any Position
	1 NO/1 NC	<b>3SB34 00-0A</b>	Any Position
	2 NO	<b>3SB34 00-0D</b>	Any Position
	2 NC	<b>3SB34 00-0E</b>	Any Position


#### Three-Position Selector Contact Block Selection

Switch Position (front of switch)	Circuit	Contact Block	Block Position <sup>1)2)</sup>
	1 NO	<b>3SB34 00-0B</b>	1 or 2A
	1 NO	<b>3SB34 00-0B</b>	2
	1 NO	<b>3SB34 00-0B</b>	3 or 2B
	1 NC	<b>3SB34 00-0C</b>	1 or 2A
	1 NC	<b>3SB34 00-0C</b>	2
	1 NC	<b>3SB34 00-0C</b>	3 or 2B
	1 NO/1 NC	<b>3SB34 00-0A</b>	1 or 2A
	1 NO/1 NC	<b>3SB34 00-0A</b>	2
	1 NO/1 NC	<b>3SB34 00-0A</b>	3 or 2B
	2 NO	<b>3SB34 00-0D</b>	1 or 2A
	2 NO	<b>3SB34 00-0D</b>	2
	2 NO	<b>3SB34 00-0D</b>	3 or 2B
	2 NC	<b>3SB34 00-0E</b>	1 or 2A
	2 NC	<b>3SB34 00-0E</b>	2
	2 NC	<b>3SB34 00-0E</b>	3 or 2B

#### Three-Position Push-Pull Contact Block Selection


Out	Center	In	Circuit	Contact Block	Block Position <sup>1)2)</sup>
x	o	o	1 NO	<b>3SB34 00-0B</b>	1 or 2A
o	o	x	1 NO	<b>3SB34 00-0B</b>	3 or 2B
x	x	o	1 NC	<b>3SB34 00-0C</b>	3 or 2B
o	x	x	1 NC	<b>3SB34 00-0C</b>	1 or 2A
o	x	x	1 NO/1 NC	<b>3SB34 00-0A</b>	1 or 2A
x	x	o	1 NO/1 NC	<b>3SB34 00-0A</b>	3 or 2B
o	o	x	1 NO/1 NC	<b>3SB34 00-0A</b>	2
x	x	x	1 NO/1 NC	<b>3SB34 00-0A</b>	2

#### Rear View of Switch



Operator without Contact Block Carrier

For Mounting Contacts Directly to Operator



Operator with Contact block carrier

For Mounting Contacts with Carrier

X — Contact Closed  
O — Contact Open  
2 — Both Pushers Inserted  
2A—Left Pusher Inserted  
2B—Right Pusher Inserted




3SB39 01-0AC for operating center position. Shown with both pushers inserted (Sold separately)



3SB39 01-0AB included with illuminated devices

#### Orienting 3-Position Push-Pull Devices

1. Pull the operator to the out position and locate the device orientation mark.
2. With the mark located, insert into panel with the mark on the left side of the device as you face the panel.

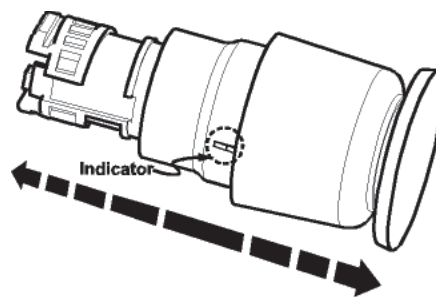

1) Positions 2, 2A and 2B cannot be used on illuminated selector switches. Position is occupied by lamp module.

2) For illuminated transformer-type devices, an extra-deep lampholder is required when using two-element contact blocks.