

TURCK

Network Media Products

DeviceNet™, eurofast® Drop Junctions

- Creates a Drop or Branch from the Main Bus Line
- Cable Drop Lengths Available Up to a Maximum of 6 Meters



Housing	Part Number	Application	Wiring Diagrams
	VB2-FKM/FKM/FSM 57	VB2 Junction <ul style="list-style-type: none"> • Ready for <i>eurofast</i> drop and trunk cordsets • Maximum six meter drop 	
	VB2-RKC 57x-*M-FKM FSM	VB2 Junction with Trunk Line <ul style="list-style-type: none"> • Ready for <i>eurofast</i> trunk line • Maximum six meter drop 	
	VB2-FKM/RKC RSC 57x-*M/*M	VB2 Junction with Trunk Line <ul style="list-style-type: none"> • Ready for <i>eurofast</i> drop cordsets • Maximum six meter branch 	

* Indicates length in meters.
 x Indicates cable type.


Specifications

Housing:	PUR (Polyurethane)
Coupling Nut:	Nickel Plated CuZn or Stainless Steel
Contact Carrier:	PUR (Polyurethane) or POM (Nylon)
Contacts:	Gold Plated CuZn
Protection:	NEMA 1, 3, 4, 6P and IEC IP 68
Rated Voltage:	250 V
Rated Current:	4 A
Ambient Temperature:	-40° to +75°C (-22° to +167°F)


Mounting: Mounting hole accepts #8 screw.

DeviceNet Media


VB2-FKM/FKM/FSM 57

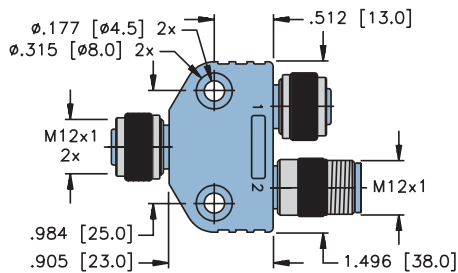

VB2-RKC 57x-*M-FKM FSM

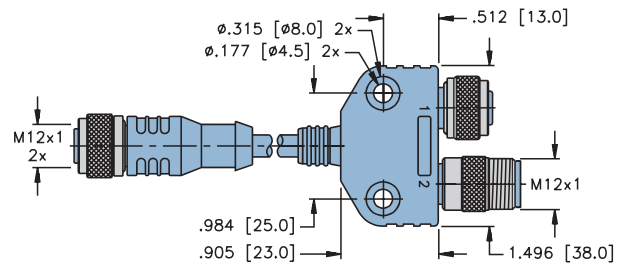

VB2-FKM/RKC RSC 57x-*M/*M

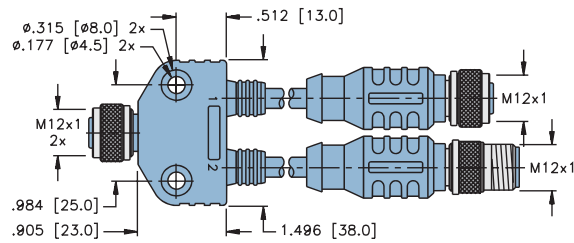

Pinouts

